

Northumbria Research Link

Citation: Liu, Lei, Korolkiewicz, Edward, Ghassemlooy, Zabih, Sambell, Alistair, Danaher, Sean and Busawon, Krishna (2013) Investigation of the equivalent circuit parameters and design of a dual polarised dual frequency aperture coupled microstrip antenna. IEEE Transactions on Antennas and Propagation, 61 (4). pp. 2304-2308. ISSN 0018-926X

Published by: IEEE

URL: <http://dx.doi.org/10.1109/TAP.2013.2241716> <<http://dx.doi.org/10.1109/TAP.2013.2241716>>

This version was downloaded from Northumbria Research Link: <http://nrl.northumbria.ac.uk/11306/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)



UniversityLibrary



Northumbria
University
NEWCASTLE

Investigation of the Equivalent Circuit Parameters and Design of a Dual Polarised Dual Frequency Aperture Coupled Microstrip Antenna

Lei Liu, *Student Member, IEEE*, Edward Korolkiewicz, *Fellow, IET*, Zabih Ghassemlooy, *Senior Member, IEEE*, Alistair Sambell, *Member, IEEE*, Sean Danaher, *Member, IEEE* and Krishna Busawon

Abstract: This paper presents a simplified approach to the design of a single feed dual polarised, dual frequency (1.9 and 2.4 GHz) aperture coupled microstrip antenna. Using simulation and practical investigation, the coupling between the microstrip feed line and aperture, along with the coupling between the aperture and patch, is investigated and modelled using equivalent transformers. The results obtained are used to reduce the number of interdependent design parameters, thereby allowing initial approximate values to be determined more directly with only fine tuning subsequently required to obtain good matching at both frequencies. Excellent agreement is obtained for the simulation and practical results of the return loss and the gain of the antenna.

Index Terms - Aperture coupled microstrip antenna, transformer turns ratio, single feed dual polarised, dual frequency antenna.

I. INTRODUCTION

There is a requirement for light, low cost, wide bandwidth and high gain microwave antennas in applications such as automatic road tolling, ‘on the move’ satellite communication services and high-capacity data networks. These requirements can often be satisfied by an aperture coupled microstrip antenna [1], [2] where different coupling slots and stack methods have been demonstrated [3]-[5]. Matched antennas at a chosen frequency have been designed using spectral domain analysis and spatial solutions [6]-[9]. Such mathematical analysis is rigorous and elegant but because the dimensions of the physical model and the values of the circuit elements of the equivalent circuit are interdependent the design of the antenna is still difficult.

In the approach presented in this paper, practical measurements and simulation are used to determine the transmission parameter S_{21} , from which the turns ratio n_f can be determined for an equivalent circuit transformer modelling the coupling between the feed line and the aperture. Using a curve fitting technique, a new equation for this turns ratio is proposed as a function of the length of the slot line and height of the substrate. It is found that this turns ratio is nearly independent of the dielectric permittivity of the substrate and frequency. The turns ratio n_p , modelling the coupling between the aperture and radiating patch, is then investigated and it is shown that the equation derived by Jaisson [10] agrees closely with obtained simulation results.


Manuscript submitted March 13, 2012. This work was supported by EU Cost Actions of IC0802 and IC1101. The authors are with the School of Computing, Engineering and Information Sciences, Northumbria University at Newcastle Upon Tyne, UK (email: lei.liu@northumbria.ac.uk)

Based on these results a simplified approach is presented to design a matched dual frequency microstrip antenna.


In this work the physical antenna structures were modelled using ‘Computer Simulation Technology (CST)’ software while the equivalent circuit modelling employed ‘Microwave Office (AWR)’ software. The electrical and physical properties of the three substrates used in this work are, PCB FR4 ($\epsilon_r = 4.3$), Duroid 5870 ($\epsilon_r = 2.3$) and Duroid 6010 ($\epsilon_r = 10.5$) all with thickness H of 1.575 mm unless otherwise specified.

II. INVESTIGATIONS OF THE TRANSFORMERS TURNS RATIOS USED IN THE EQUIVALENT CIRCUIT OF THE ANTENNA

The physical structure and equivalent circuit of the dual polarised dual frequency aperture coupled microstrip antenna are well documented in [1], [2]. The physical structure of a slot line fed by a microstrip feed line is shown in Fig. 1(a) and the equivalent circuit is shown in Fig. 1(b). In the equivalent circuit the transformer (with turns ratio n_f) models the coupling between the slot line and the microstrip feed line, while Z_s is the input impedance of the slot line and Z is the impedance produced on the microstrip feed line [10]. For an infinitely long slot line Knorr [11], [12] and Das [13] derived equations for n_f showing that it is always less than one. Bhattacharyya [14] used full wave analysis to obtain integral equations to plot this turns ratio as a function of the length of the slot line and height of the substrate. He found that this turns ratio increased with the length of the slot line and decreased with substrate thickness but did not appreciably change with the width of the slot line. In ref. [8] Bhattacharyya used spectral domain analysis to derive a large number of complex equations which had to be computed numerically to obtain a matched aperture coupled antenna. Himdi [15], Kyriacou [16] and Jaisson [10] derived different equations for n_f (and similarly for n_p) however it was found that the equations did not agree with each other and even n_f was greater than one as the length of the slot line increased. Hence in this section the turns ratios n_f and n_p are investigated by simulation and practical measurements. To obtain the turns ratio n_f it is first necessary to determine the impedance Z from the S_{21} parameter defined by Fig. 2(a). In this figure the slot line is fed by a 50Ω microstrip feed line of length L_1+L_2 and to calibrate out the measurements errors produced by the length L_1+L_2 a 50Ω calibration line of the same length is used in Fig. 2(b).

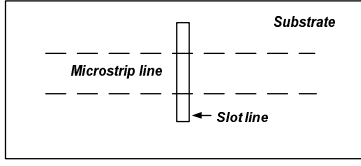


(a)



(b)


Fig. 1 (a) Microstrip-slot line structure (b) Equivalent circuit of the microstrip-slot line structure

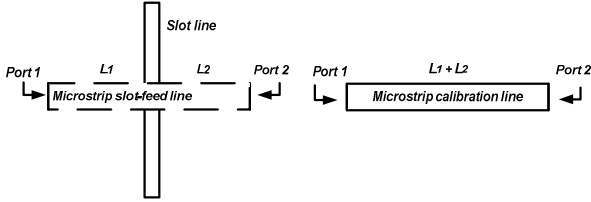


(a)

(b)

Fig. 2 (a) Signal flow graph of the feed line and the two port network (b) Signal flow graph of the calibration line

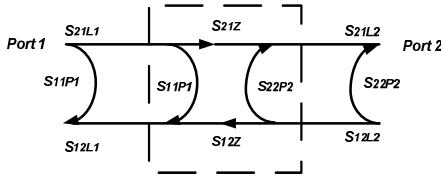

(a)

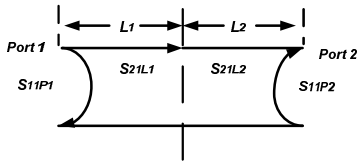

(b)

Fig. 3 Signal flow graphs (a) of the feed line and the two port network (b) of the through line

The impedance of the ports is 50Ω and the signal flow graphs of the two structures in terms of S-parameters are shown in Fig. 3. In Fig. 3(a), S_{21L1} , S_{21L2} are the transmission parameters for the lengths L_1 and L_2 of the microstrip feed line. The impedance Z is modelled by a two port network defined by S_{11Z} , S_{22Z} , S_{21Z} , and S_{12Z} . In Fig. 3(b) S_{21L1} and S_{21L2} are the transmission parameters of the microstrip calibration line. Equations (1) and (2) are obtained from the two signal flow graphs where, S_{21T} is the transmission parameter between port 1 and port 2 in Fig. 3(a) and S_{21C} between ports 1 and port 2 in Fig. 3(b).




Fig. 4 Microstrip feed lines on one side, and five slot lines on the other, of a fabricated PCB board

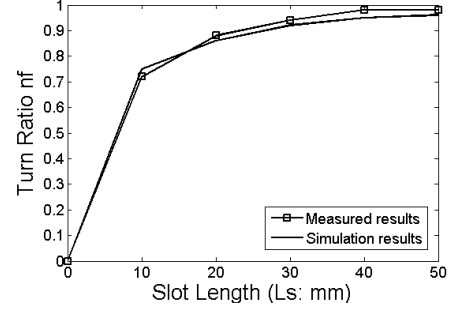


Fig. 5 Measured and simulation results for the turn ratio n_f as a function slot line lengths

$$S_{21T} = S_{21L1} * S_{21Z} * S_{21L2} \quad (1)$$

$$S_{21C} = S_{21L1} * S_{21L2} \quad (2)$$

Equations (3) and (4) are used to determine S_{21Z} and Z by practical measurements and simulation.

$$S_{21Z} = \frac{S_{21T}}{S_{21C}} \quad (3)$$

$$Z = \frac{2Z_0 - 2Z_0 S_{21Z}}{S_{21Z}} \quad (4)$$

The PCB FR4 board shown in Fig. 4 was used for practical measurements: one side of the board shows 5 slot lines of lengths 10, 20, 30 40 and 50mm and the other side shows the five 50Ω feed microstrip lines, as well as a 50Ω microstrip calibration line. The width of the slot line was 1mm and equations derived in [11] were used to determine the slot line input impedance Z_S (see Fig. 1(b)). The turns ratio n_f was obtained from the S_{21} parameter determined by both practical measurement and simulation. Fig. 5 shows excellent agreement between these two approaches for determining n_f . It is important to note that this turns ratio has a limited range of 0.9 to 0.98 for a slot line length over 25 mm that is typical in the design of an antenna at around 2 GHz.

The effect of three different substrate thicknesses (0.7875, 1.575 and 2.5mm) on n_f was also investigated by simulation as described above and equation (5) was obtained from curve fitting the results.

$$n_f = 1 - e^{-\frac{Ls}{4H}} \quad (5)$$

For the three substrates of different permittivity, with a fixed slot line of length 30mm, the above method was used to obtain the frequency response of the feed line impedance Z for the physical structure and the equivalent circuit. It was found that the obtained frequency response of the physical structure, even over an extended range of 1GHz to 5GHz, agreed very closely with the frequency response obtained from the equivalent circuit. As the turns ratio n_f has a constant value in the equivalent circuit it can be concluded n_f is effectively

independent of both frequency and the relative permittivity of the substrate across the parameter ranges investigated.

In investigating the turns ratio n_p modelling the coupling between the slot line and patch, first, the feed-slot dimensions were kept constant to ensure that the turns ratio n_f had a fixed value and the patch width was varied from 50 mm to 80 mm. Then different slot line lengths up to 50 mm were varied and in each case n_p was tuned using AWR software until the input impedance of the equivalent circuit and that of the physical structure using CST simulation were in agreement. It was found that the determined turns ratio agreed very closely with equation (6) derived by Jaisson [10] where L_s is the length of the slot line and w_p is physical width of the patch.

$$n_p = \frac{L_s}{2w_p} \quad (6)$$

A wide matching bandwidth and high gain antenna can be obtained by using a thick air substrate below the patch [17]. From a simulation investigation of different patch widths, equation (7) was derived for the length of the fringing field as a function of the height H (mm) of the air substrate using a curve fitting approach.


$$\Delta L = 12(1 - e^{-\frac{H}{5}}) \quad (7)$$

III. DESIGN OF A DUAL POLARISED DUAL FREQUENCY MATCHED ANTENNA


To obtain a dual frequency antenna, modes at 1.9 GHz and 2.4 GHz are excited by the two slot lines near the edges of the patch as shown in Fig. 6(a). In this figure L_{p1} and L_{p2} are the physical dimensions of the patch while L_{s1} and L_{s2} are the lengths of the two slots. The height of the air substrate above the ground plane was designed as 8 mm and the substrate below ground plane was PCB FR4. The equivalent circuits of the two modes are shown in Fig. 6(b) where R models the radiated power from the patch's radiating slots and C models the fringing fields at the physical edges of the patch [2].

The resonant frequency of the series input impedance of the patch at the position of slot line is normally above the design frequency. Hence the effective length of the patch should be slightly less than the half-wavelength (approx. $0.9\lambda_p/2$) where λ_p is the patch wavelength at the design frequency. The approximate effective dimensions of the patch are 76 mm at 1.9 GHz and 61 mm at 2.4 GHz. The corresponding physical dimensions of the patch using equation (7) are 57mm at 1.9 GHz and 43mm at 2.4 GHz.

The resonant frequency of the slot line is normally higher than the design frequency so that the slot length L_s should be approximately be $0.7\lambda_s/2$. Consequently the assumed initial physical lengths of the slot lines obtained are 33 mm at 2.4 GHz and 42 mm at 1.9 GHz. These lengths were then used in equation (5) and the initial approximate value of n_f was 0.96 at 1.9 GHz and 0.95 at 2.4 GHz. Substituting the above slot lines lengths and the physical widths of the patch into equations (6) gives approximate values for the turns ratio n_p as

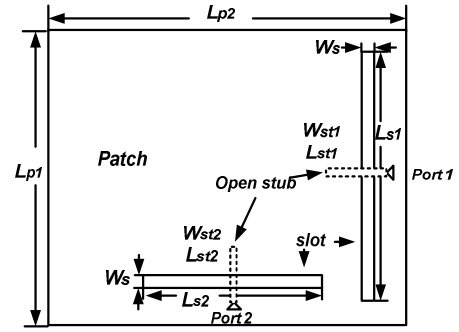

(a)

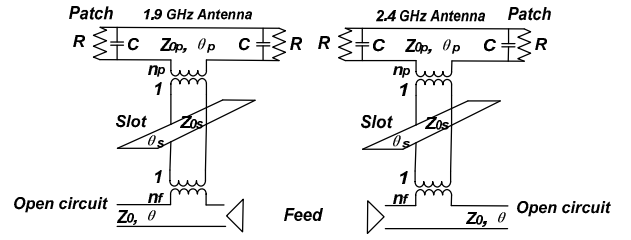

(b)

Fig. 6 (a) Physical structure of the antenna (b) Equivalent circuits of the antenna at the two frequencies

0.217 at 2.4 GHz and 0.33 at 1.9 GHz. The two feed ports in Fig. 6(b) were replaced by a single feed port as shown in the photograph of the fabricated antenna in Fig. 7.

Table 1 shows that the initial and final tuned values for the antenna are close. Fig. 8 shows that a very good agreement has been obtained between the simulated and measured frequency responses for the reflection coefficient and for the gain of the antenna. Simulation results showed that gain of 6.3dB at 1.9 GHz and 7dB at 2.4 GHz with corresponding practical measurements of 6.6 dB at 1.9 GHz and 7.2 dB at 2.4GHz.

Table 1

Dimension of dual frequency aperture coupled slot antenna		
1.9 GHz		
Parameter	Initial value	Final tuned value
L_{p1}	38 mm	43 mm
L_{p2}	53 mm	57 mm
W_s	1 mm	1 mm
L_{s1}	42 mm	41 mm
ΔL_{p1}	9.5 mm	9.3 mm
Turn ratio n_f	0.965	0.972
Turn ratio n_p	0.327	0.326
R	646 Ω	646 Ω
2.4GHz		
Parameter	Initial value	Final tuned value
L_{p1}	38 mm	43 mm
L_{p2}	53 mm	57 mm
W_s	1 mm	1 mm
L_{s2}	33 mm	35 mm
ΔL_{p2}	9.5 mm	9.3 mm
Turn ratio n_f	0.952	0.94
Turn ratio n_p	0.217	0.228
R	368 Ω	368 Ω



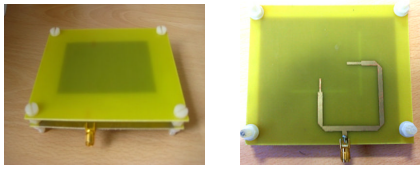


Fig. 7 Photograph of the two sides of the fabricated antenna

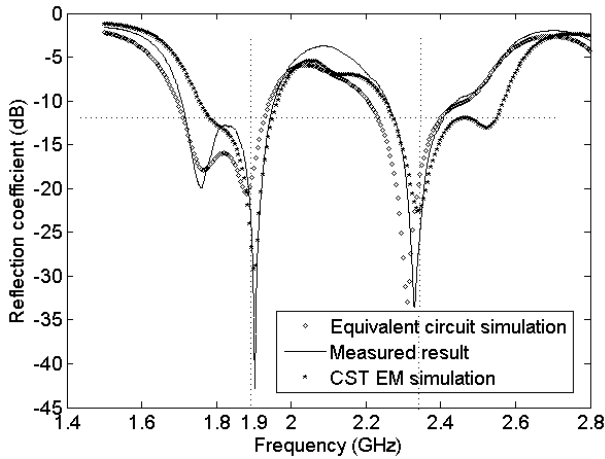

(a)

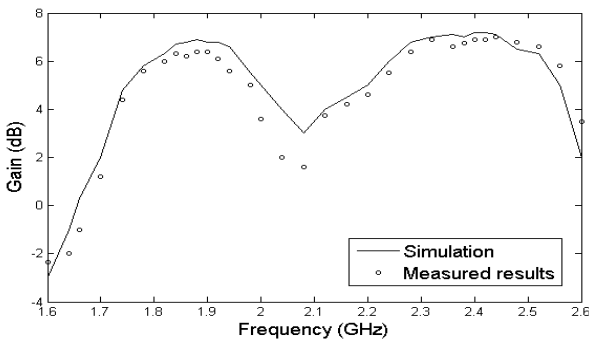

(b)

Fig. 8 Simulated and practical frequency response (a) Reflection Coefficient (b) Gain of the antenna

IV. CONCLUSIONS

In this paper a simplified practical approach was used to design a dual frequency matched aperture coupled microstrip antenna. From the investigation carried out, new equations have been obtained for the turn ratios n_f and the length of the fringing field at the patch. The turns ratio n_f was found to have an almost constant value (0.9-0.98) for practical slot lengths of longer than 25mm used at the two design frequencies. Simulation investigation showed that the equation derived by Jaisson [10] for the turns ratio n_p is sufficiently accurate to be used in the design of this antenna. Based on these results it is shown that the design complexity of the dual frequency antenna was reduced. Very good agreement was obtained between the practical and simulated results for both the frequency response of the reflection coefficient and the gain of the antenna around the two design frequencies.

REFERENCES

- [1] D. M. Pozar, "Microstrip Antenna Aperture-Coupled to a Microstrip line," *Electronics Letters*, vol. 21, pp. 49-50, 1985.
- [2] C. A. Balanis, *Antenna theory: analysis and design*, 3rd ed. Hoboken, N.J. Great Britain: Wiley-Interscience, 2005.
- [3] R. Caso, A. Serra, A. Buffi, M. Rodriguez-Pino, P. Nepa, and G. Manara, "Dual-polarised slot-coupled patch antenna excited by a square ring slot," *IET Microwaves Antennas & Propagation*, vol. 5, pp. 605-610, Apr 11 2011.
- [4] M. Barba, "A high-isolation, wideband and dual-linear polarization patch antenna," *IEEE Transactions on Antennas and Propagation*, vol. 56, pp. 1472-1476, May 2008.
- [5] A. A. Serra, P. Nepa, G. Manara, G. Tribellini, and S. Cioci, "A wide-band dual-polarized stacked patch antenna," *IEEE Antennas and Wireless Propagation Letters*, vol. 6, pp. 141-143, 2007.
- [6] D. M. Pozar, "A Reciprocity Method of Analysis for Printed Slot and Slot-Coupled Microstrip Antennas," *IEEE Transactions on Antennas and Propagation*, vol. 34, pp. 1439-1446, Dec 1986.
- [7] Y. T. Lo, B. Engst, and R. Q. Lee, "Simple Design Formulas for Circularly Polarized Microstrip Antennas," *IEE Proceedings-H Microwaves Antennas and Propagation*, vol. 135, pp. 213-215, Jun 1988.
- [8] A. K. Bhattacharyya, Y. M. M. Antar, and A. Ittipiboon, "Spectral Domain Analysis of Aperture-Coupled Microstrip Patch Antennas," *IEE Proceedings-H Microwaves Antennas and Propagation*, vol. 139, pp. 459-464, Oct 1992.
- [9] B. Al-Jibouri, H. Evans, E. Korolkiewicz, E. G. Lim, A. Sambell, and T. Vlasits, "Cavity model of circularly polarised cross-aperture-coupled microstrip antenna," *IEE Proceedings-Microwaves Antennas and Propagation*, vol. 148, pp. 147-152, Jun 2001.
- [10] D. Jaisson, "Transmission line model for the input impedance of a slot-coupled rectangular patch antenna," *IEE Proceedings-Microwaves Antennas and Propagation*, vol. 153, pp. 461-468, Oct 2006.
- [11] J. B. Knorr, "Slot-Line Transitions," *IEEE Transactions on Microwave Theory and Techniques*, vol. Mt22, pp. 548-554, 1974.
- [12] J. B. Knorr and J. Saenz, "End Effect in a Shorted Slot," *IEEE Transactions on Microwave Theory and Techniques*, vol. Mt21, pp. 579-580, 1973.
- [13] N. K. Das, "Generalized Multiport Reciprocity Analysis of Surface-to-Surface Transitions between Multiple Printed Transmission-Lines," *IEEE Transactions on Microwave Theory and Techniques*, vol. 41, pp. 1164-1177, Jun-Jul 1993.
- [14] A. K. Bhattacharyya, Y. M. M. Antar, and A. Ittipiboon, "Full-Wave Analysis for the Equivalent-Circuit of an Inclined Slot on a Microstrip Ground Plane," *IEE Proceedings-H Microwaves Antennas and Propagation*, vol. 139, pp. 245-250, Jun 1992.
- [15] Lafond, M. Himdi, and J. P. Daniel, "Cavity method for slot-fed patches: Inclined line, circular polarization," *15eme Colloquium International Optique Hertzienne Et Dielectriques, Ohd'99*, pp. A9-A12 288, 1999.
- [16] G. A. Kyriacou, O. Breinbjerg, and J. N. Sahalos, "Aperture Coupled Microstrip Antennas: A Design Approach," in *Seventh International Conference on Advances in Communication and Control Proceedings*, W. R. Wells, Ed. New York. Los Angeles: publications Division, 1999.
- [17] D. M. Pozar, "A Review of Aperture Coupled Microstrip Antennas: History, Operation, Development, and Applications," *University of Massachusetts at Amherst*, 1996.