

Northumbria Research Link

Citation: Mohan, Nithin, Ghassemlooy, Zabih, Zvanovec, Stanislav, Hudson, R. and Mansour Abadi, Mojtaba (2019) Sectorized Base Station for FSO Ground to Train Communications. In: PGCon Edinburgh Postgraduate Conference 2019: A free training and networking event for postgraduate students, 15-16 Oct 2019, Edinburgh, UK. (Unpublished)

URL: <https://commnet.ac.uk/pgcon2019/> <<https://commnet.ac.uk/pgcon2019/>>

This version was downloaded from Northumbria Research Link: <http://nrl.northumbria.ac.uk/id/eprint/41287/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)

Objectives

A free space optics (FSO)-based wireless technology for use in high-speed trains is proposed, where a sectorized base station using a single laser and multiple single mode fibre apertures is proposed. By doing so the link's geometrical loss is considerably reduced, thus leading to improve signal to noise ratio. The proposed system is numerically simulated and the link performance evaluated in terms of the bit error rate

Introduction

Evolution and accessibility of smart-phones has led to a huge demand in the network bandwidth. The ubiquitous use of smart-phones in high speed trains pose a unique challenge in delivering fast internet services on board the trains. In Japan, high speed trains employing WiFi, Wimax and LCX wireless technologies provide internet on board with the average throughput of 1.4 Mbps [1]. In UK, Crosscountry trains have a fixed usage policy, where excessive usage leads to limited access to WiFi by the passengers. Free space optics has emerged as a popular alternative to provide high-speed internet access since it is immune to multi-path propagation and interference from other transmitters, which degrade the system performance as in RF technologies [2]. Implementation of FSO for ground-train communications (GTC) focuses on providing a large coverage area for the BS, which reduces the deployment costs and provides uninterrupted internet service with negligible handover delay. Previous works on FSO systems have provided a experimental validation on GTC. A high data rate (1 Gbps) GTC was proposed in [3], where an acquisition, tracking and pointing (ATP) mechanism based on the beaconing system was used to provide stable tracking and fast handover (i.e., 100 ms) in FSO links for high-speed trains. In [4], a high-speed image sensor based ATP mechanism was used in place of a 2-quadrant photo-diode to detect the beacon signal from the adjacent BS.

Proposed system

Theoretical models in [5], [6] have proposed employ wide optical beams to extend the trackside coverage thereby reducing the number of FSO base stations (BS). FSO links using wide divergence angle laser sources suffer from high geometric losses which may result in frequent link outages.

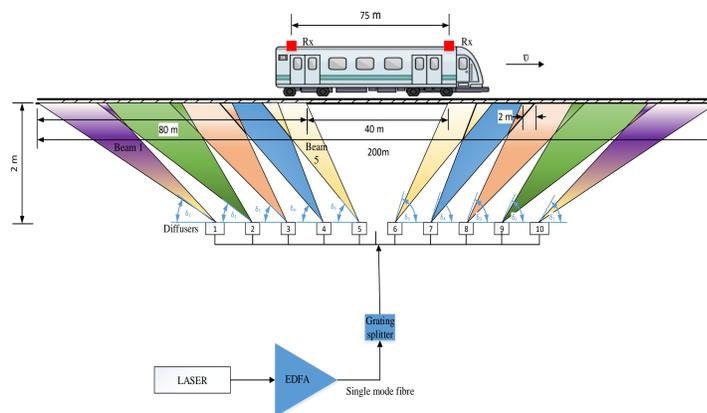


Fig. 1 Sectorised base-station concept for ground to train communications.

To mitigate the effects of geometric loss and increase the coverage length of each ground base station for ground to train communication, multiple laser beams covering the trackside is employed along with deploying large (200-250 mm diameter) receiver lenses on train and on the ground base stations as well. In this scheme a single laser source is used the output of which is amplified using an erbium doped fibre amplifier (EDFA) prior to being split into 10 fibre-based transmitter (Tx). Diffusers are used at the end of the fibre-array for illuminating the track (i.e., moving train) Note the spacing between the fibres are 7 cm, and the overlapping areas of the optical beams are 2 m in order to provide seamless connectivity throughout the coverage area of 200 m. As shown in Fig. 1(a) the effective coverage area along the track is 160 m (i.e., 2×80 m) and with a dead-zone of 40 m. The power budget analysis for ground-train communications is given by :

$$P_{rx}(l_{link}, r) = 10^{\frac{(L_{atm}l_{link})}{10}} \times 10^{\frac{(L_{geom})}{10}} \times 10^{\frac{(L_{opt})}{10}} P_{tx} \times \frac{2r^2}{w_R^2} \quad (1)$$

where P_{rx} is received power, l_{link} is the link length, P_{tx} is the transmit power for each fibre, L_{geom} is the geometric loss due to the diverging beam, L_{atm} is the atmospheric attenuation in dB/km r is the beam offset from the propagation axis and w_R is the beam waist radius. Using (1) the transmit power for each beam is calculated. For train to ground communication, three equally spaced transmitters are used for train to ground communication as shown in Fig. 2

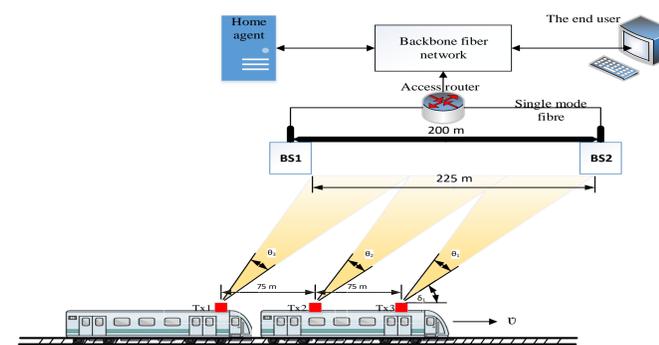


Fig. 2 Train to ground communications

Effect of turbulence

Atmospheric turbulence caused by variations in refractive indices due to temperature variations, change in humidity induces irradiation fluctuations at the receiver causing severe degradation of the signal and can also result in link outage.

The strength of turbulence can be determined by the scintillation index given by [2]:

$$\sigma_I^2 = \frac{\langle I^2 \rangle - \langle I \rangle^2}{\langle I \rangle^2} \quad (2)$$

where $\langle \cdot \rangle$ denotes the ensemble average equivalent to long-time averaging with the assumption of an ergodic process and I is the optical intensity of the propagating wave in turbulent channel.

Based on (2), the strength of turbulence can be classified as weak fluctuations regime ($\sigma_I^2 < 1$), moderate fluctuations regime ($\sigma_I^2 \approx 1$) and strong fluctuations regime ($\sigma_I^2 > 1$). If a receiving aperture is larger than a spatial scale size that produces the irradiance fluctuations, the receiver will average the fluctuations over the aperture and the scintillation will be less compared to scintillation measured with a point receiver [7].

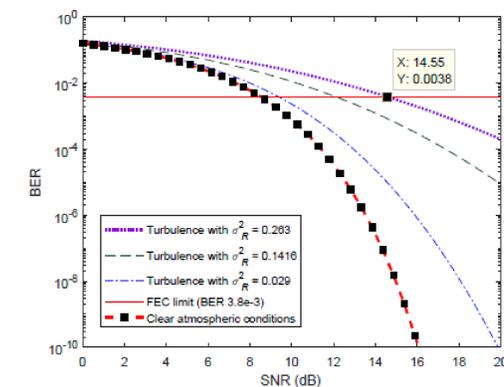


Fig. 3 Average BER for $\sigma_R^2 = 0.263, 0.1416$ and 0.029

Numerical simulations have been performed for varying strengths of weak turbulence for a link length of 100 m as shown in Fig. 3. It is observed that the system SNR should be greater than 14.55 to achieve FEC limit. Forward error correcting codes can be employed to improve the BER of the system.

Acknowledgement

The PhD is funded by the ERDF under the intensive industrial innovation program northeast (IIP NE)

References

- [1] Terada, M. and F. Teraoka. Providing a high-speed train with a broadband and fault tolerant IPv4/6 NEMO environment. 2012 IEEE Globecom Workshops.
- [2] Rajbhandari, S., Ghassemlooy, Z., Haigh, P. A., Kanesan, T., & Tang, X. "Experimental error performance of modulation schemes under a controlled laboratory turbulence FSO channel". Journal of Lightwave Technology, 33(1), 244-250, 2014.
- [3] H. Urabe et al., "High Data Rate Ground-to-Train FreeSpace Optical Communication System," Optical Engineering, Special Section on Free-Space Laser Communications, vol. 51, no. 3, Mar. 2012.
- [4] Mori, K et al., "Fast handover mechanism for high data rate ground-to-train free-space optical communication system," 2014 IEEE Globecom Workshops (GC Wkshps), Austin, TX, 2014, pp. 499-504, 2014.
- [5] Q. Fan, M. Taheri, N. Ansari, J. Feng, R. Rojas-Cessa, M. Zhou and T. Zhang, "Reducing the Impact of Handovers in Ground-to-Train Free Space Optical Communications," in IEEE Transactions on Vehicular Technology, vol. 67, no. 2, pp. 1292-1301, Feb. 2018.
- [6] S. Fathi-Kazerooni et al., "Optimal Positioning of Ground Base Stations in Free-Space Optical Communications for High-Speed Trains," in IEEE Transactions on Intelligent Transportation Systems, vol. 19, no. 6, pp. 1940-1949, June 2018.
- [7] Vetelino, F. S., Young, C., Andrews, L., & Reolons, J. "Aperture averaging effects on the probability density of irradiance fluctuations in moderate-to-strong turbulence", Applied Optics, 46(11), 2099-2108, 2007.