

Northumbria Research Link

Citation: Xu, Ben (2016) A new microfluidic switch technique by controllably buckling Stimuli-responsive polyelectrolyte hydrogel thin layer. In: Polymer Networks Group meeting, 19th - 23rd June 2016, Stockholm.

URL:

This version was downloaded from Northumbria Research Link:
<http://nrl.northumbria.ac.uk/id/eprint/27182/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)

A new microfluidic switch technique by controllably buckling Stimuli-responsive polyelectrolyte hydrogel thin layer

Ben B. Xu,

Smart Materials and Surfaces Lab,

Faculty of Engineering and Environment,

Northumbria University,

Newcastle upon Tyne, NE1 8st, UK

e-mail: ben.xu@northumbria.ac.uk

Abstract:

Elastic mechanical instabilities in thin polymer films may present as different out-of-plane deformation modes including wrinkling, creasing, buckling, folding, and delamination. Elastic transformation can achieve the giant morphology change in very short time. Recent experimental and theoretical progress has provided a fundamental understanding on these instabilities in gel systems (*Phys. Rev. Lett.* **105**, 2010; *Adv. Mater.* **23**, 2011; *Soft Matter* **8**, 2012; *Soft Matter* **10**, 2013). Some applications incorporate buckled thin film structures into devices to fulfill certain purposes such as, to prevent device/structure failure during large deformations (*Adv. Mater.* **20**, 2008), to relieve surface/interfacial mechanical stress (*Nature Nanotech.* **1**, 2006), to yield novel strain sensing structures (*Adv. Mater.* **26**, 2014), or to improve the efficiency of solar cells. (*Nat. Photonics* **6**, 2012). In recent work, we have shown fast actuation of crease instability (< 1 sec) on the surfaces of thin ionic hydrogel layers at low electric voltages of 2 – 4 V (*Adv. Mater.* **25**, 2013) by constructing layer system.

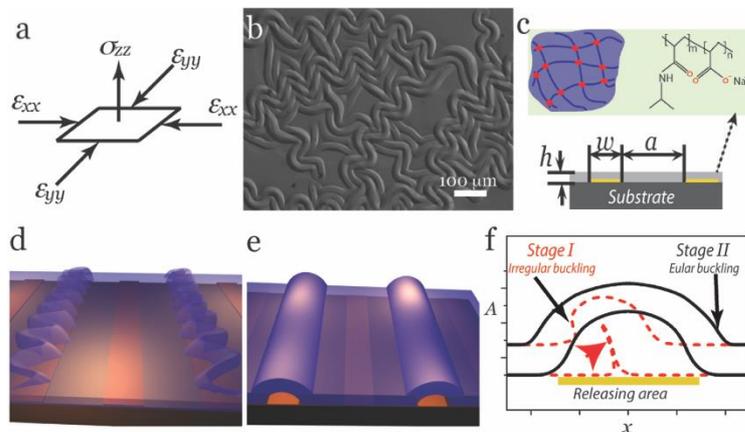


Fig.1 a) Stress state before buckling, b) buckling induced delamination stripes patterns, c) Structure design and PNIPAM gel, d) Electro-actuated irregular buckling blisters, and e) Euler buckling blisters, f) cross-sections of irregular buckling blister and Euler buckling.

In the current report, we describe the reversible electrically actuated delamination and buckling of a thermally responsive poly(*N*-isopropylacrylamide-*co*-sodium acrylate) (PNIPAM) polyelectrolyte gel layer on micro-patterned electrode surfaces. Through a two-step mechanism corresponding to electrochemically-triggered delamination at a first critical voltage, followed by gas bubble formation at a second critical voltage, we demonstrate that

large out of plane displacements (up to 8 times the initial gel thickness) can be achieved, with rapid switching at modest triggering voltages (from – 3 to – 6 V). Using thermally triggered deswelling of the gel, we show that it is possible to return the gel to its initially flat and adherent state, enabling reproducible formation of buckled structures through multiple cycles of actuation. Our ambition is to investigate the actuated buckling instability and use it as passive valve for micro-fluidic application.