

# Northumbria Research Link

Citation: Kovalcinova, L., Karmakar, S., Schaber, M., Schuhmacher, A.-L., Scheel, M., DiMichiel, M., Brinkmann, Martin, Seemann, R. and Kondic, L. (2018) Energy dissipation in sheared wet granular assemblies. *Physical Review E*, 98 (3). 032905. ISSN 2470-0045


Published by: American Physical Society

URL: <https://doi.org/10.1103/PhysRevE.98.032905>  
<<https://doi.org/10.1103/PhysRevE.98.032905>>

This version was downloaded from Northumbria Research Link:  
<http://nrl.northumbria.ac.uk/id/eprint/42463/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)



# CHORUS

This is the accepted manuscript made available via CHORUS. The article has been published as:

## Energy dissipation in sheared wet granular assemblies

L. Kovalcinova, S. Karmakar, M. Schaber, A.-L. Schuhmacher, M. Scheel, M. DiMichiel, M. Brinkmann, R. Seemann, and L. Kondic

Phys. Rev. E **98**, 032905 — Published 19 September 2018

DOI: [10.1103/PhysRevE.98.032905](https://doi.org/10.1103/PhysRevE.98.032905)

# Energy dissipation in sheared wet granular assemblies

L. Kovalcinova,<sup>1</sup> S. Karmakar,<sup>2</sup> M. Schaber,<sup>2</sup> A.-L. Schuhmacher,<sup>2</sup> M. Scheel,<sup>3,4</sup> M. DiMichiel,<sup>3</sup> M. Brinkmann,<sup>2</sup> R. Seemann,<sup>2</sup> and L. Kondic<sup>1</sup>

<sup>1</sup>*Department of Mathematical Sciences, New Jersey Institute of Technology, New Jersey, USA*

<sup>2</sup>*Experimental Physics, Saarland University, Saarbrücken, D-66123, Germany*

<sup>3</sup>*European Synchrotron Radiation Facility, Grenoble, F-38043, France*

<sup>4</sup>*Synchrotron Soleil, 91192 Gif-sur-Yvette, France*

(Dated: August 27, 2018)

Energy dissipation in sheared dry and wet granulates is considered in the presence of an externally applied confining pressure. Discrete element simulations reveal that for sufficiently small confining pressures, the energy dissipation is dominated by the effects related to the presence of cohesive forces between the particles. The residual resistance against shear can be quantitatively explained by a combination of two effects arising in a wet granulate: i) enhanced friction at particle contacts in the presence of attractive capillary forces, and ii) energy dissipation due to the rupture and reformation of liquid bridges. Coulomb friction at grain contacts gives rise to an energy dissipation which grows linearly with increasing confining pressure, for both dry and wet granulates. Because of a lower Coulomb friction coefficient in the case of wet grains, as the confining pressure increases the energy dissipation for dry systems is faster than for wet ones.

## I. INTRODUCTION

The mechanics of wet granulates plays a prominent role in various fields of process engineering, including the production of pharmaceuticals [1–4], wet granulation of powders [5–7], sintering [8] and food production [9]. Owing to this outstanding importance, a large number of experimental studies and physical models have been devoted to the mechanics of wet granular matter, e.g. [10–18]. The transport of stresses in a dry granulate is governed by an interplay between frictional and repulsive forces acting between the constituting grains. Dry granulates easily flow under external forces such as gravity and hardly resist to shear. However, a confining stress applied to the grains at the surface of the assembly can reversibly turn a dry granulate into a solid-like material [19]. Hence externally applied confining stresses alter the mechanics of a granular assembly. A change of the mechanical properties also occurs when dry grains are mixed with a small amount of a wetting liquid. Granular assembly then turns into a plastically deformable material, which can sustain finite tensile and shear stresses [20].

In this paper, we explore the rheology of dry and wet granulates in the presence of an externally applied confining stress. To quantify the resistance to shear as a function of the confining stress, we determine the energy dissipated in an assembly of particles over a stationary shear cycle. We perform simulations using Discrete Element Method (DEM) applied to dense granular packs with shearing protocol inspired by recent experiments of the 3D packs of wet and dry glass beads [11, 21]. Figure 1 shows a typical snapshot obtained using 3D tomography.

From the simulations, we extract the information about the source of energy dissipation due to direct particle-particle interaction (friction, inelastic interactions) as well as due to breaking and reformation of capillary bridges. The analysis of various contributions to the total energy dissipation provides an insight into the

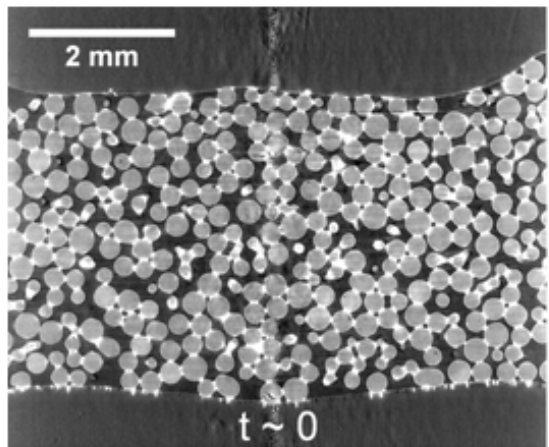


FIG. 1: 2D slice through a 3D x-ray tomography of a sheared wet glass bead assembly [22], see also [11, 21]. The gray level indicates the different phases (white: aqueous  $\text{ZnI}_2$  solution; gray: glass beads; black air).

differences between dry and wet granular sheared packs and the main sources of energy loss. The main finding resulting from our simulations is that, for small applied pressures, the energy dissipated during the process of breakage and reformation of the capillary bridges is a main source of energy dissipation, dominating both the dissipation due to direct particle-particle interaction and the dissipation arising in the presence of capillary cohesion. However, for large applied pressure, friction dominates the particle-particle interaction for both wet and dry granulates. Accordingly, the work to shear a dry granulate becomes larger than that to shear a wet one for sufficiently large confining pressure.

This paper is organized as follows. In Section II we

describe the setup of DEM and discuss various energy loss mechanisms for wet and dry systems. In Section III we focus on energy dissipation mechanisms, discussing in particular the contributions due to non-affine motion of the particles and internal cohesion. We summarize the results in Section IV.

## II. METHODS

### A. Computational model

Discrete element simulations of two-dimensional packs of circular particles that are subject to shear deformations were carried out with a setup close to the experiments described in [11]. The aim of this study is to reveal the fundamental mechanisms that control the dissipation in sheared assemblies of wet and dry particles. Details of the simulation techniques for dry granular matter could be found in e.g. Ref. [23] and Appendix A. For later convenience we express all the quantities used in simulations in terms of the following scales: average particle diameter,  $\bar{d}$ , as the length-scale, average particle mass,  $m$ , as mass scale, and the binary particle collision time,  $\tau_c = \pi\sqrt{\bar{d}/2gk_n}$ , as the time scale. The parameter  $k_n$  corresponds to the normal spring constant between two colliding particles and  $g$  is the acceleration of gravity. The parameters entering the force model can be connected to physical properties (Young modulus, Poisson ratio) as described, e.g. in Ref. [24]. The inter-particle friction coefficient for dry and wet assemblies is  $\mu_{\text{dry}} = 0.29$  and  $\mu_{\text{wet}} = 0.25$ , respectively, to capture different friction properties of the granular material when a small amount of liquid is added between particles [11]. Furthermore, we use  $k_n = 4 \times 10^3$ , and the coefficient of restitution, as a measure of the inelasticity of collisions, is  $e = 0.5$ .

The motivation for choosing the value of  $k_n$  that is smaller than appropriate for the glass beads used in the experiments [11] is the computational complexity: the simulations need to be carried out for long times in physical units, increasing computational cost; the use of softer particles allows for the use of larger computational time steps. To confirm that only quantitative features of the results are influenced by this choice, we have carried out limited simulations with stiffer particles, that led to similar results as the ones presented here.

In modeling capillary cohesion, we are motivated by the experiments [22], see also Fig. 1, and employ the capillary force model for three dimensional (3D) pendular bridges proposed by Willet et al. [25]. We motivate the choice of the force model between 3D spheres by the effort to use the same type of cohesive interaction between particles as the one expected in experiments. Note that according to [26], cohesive force in 2D assumes a local maximum at a non-zero distance of the particles, in contrast to the 3D model. Furthermore, to simplify the implementation, we use the approximate expression,

Eq. (12) in [21, 25], given here in nondimensional form

$$F_{c,ij} = \frac{\pi d \sigma \cos \theta}{1 + 1.05 \hat{S}_{i,j} + 2.5 \hat{S}_{i,j}^2}, \quad (1)$$

where  $\hat{S}_{i,j} = S_{i,j} \sqrt{1/(2V)}$  and  $S_{i,j} = r_{i,j} - (d_i + d_j)/2$  is the separation of the particle surfaces, where  $r_{i,j}$  is the distance between the centers of the circular particles  $i, j$ . The inverse value of the reduced diameter is  $1/d = (1/d_i + 1/d_j)/2$  and  $d_i, d_j$  are the particle diameters. To simplify the computations we assume (only when computing  $d$ ) that  $d_i = d_j = 1$  for all  $i, j$  pairs, and therefore  $d = 1$  (for generality we keep  $d$  in the expressions that follow. The maximum separation,  $S^{\text{max}}$ , at which a capillary bridge breaks is given by [25]:

$$S^{\text{max}} = (2 + \theta) \left( \frac{V^{1/3}}{d} + \frac{2V^{2/3}}{d^2} \right), \quad (2)$$

where  $V$  is the non-dimensional capillary bridge volume. During a collision we set  $S_{i,j} = 0.0$  (even when  $r_{i,j} < (d_i + d_j)/2$ ) since the cohesive force has a constant value when the particles are in contact (regardless of the amount of compression resulting from collision) [21].

For the contact angle,  $\theta$ , and the surface tension,  $\sigma = \bar{\sigma} \tau_c^2 / m$ , we use  $\theta = 12^\circ$  and  $\bar{\sigma} = 72$  mN/m motivated by the parameters of the experiments in [11]. The mass is computed from the density of a glass bead ( $\rho = 2.5 \times 10^3$  kg/m<sup>3</sup>) of average diameter  $\bar{d}$ .

All capillary bridges in expressions (1) and (2) are assumed to have equal liquid volume  $V = 7.4 \times 10^{-3} \bar{d}^3$ . This value corresponds to the average value in a 3D pack of monodisperse spherical beads with average diameter  $\bar{d}$  with a liquid content of  $W = 2.5\%$  [21] with respect to the total volume.

A bridge forms after two particles touch and breaks when the bridge length exceeds the maximum surface-to-surface separation  $S^{\text{max}}$ . The energy dissipated during a full cycle of formation and rupture is computed by integrating the bridge force  $F_c$  between  $S = 0$  and  $S = S^{\text{max}}$ , and can be expressed in closed form as:

$$E_c^{\text{max}} = 4\pi\sigma \cos \theta \sqrt{\frac{dV}{2\epsilon}} \left[ \arctan \left( 5S^{\text{max}} \sqrt{\frac{d}{2V\epsilon}} + \frac{\delta}{\sqrt{\epsilon}} \right) - \arctan \left\{ \frac{\delta}{\sqrt{\epsilon}} \right\} \right], \quad (3)$$

with numerical constants  $\delta = 1.05$  and  $\epsilon = 8.8795$ . With the present choice of parameters, we have the following numerical values that we provide here for the future reference:  $E_c^{\text{max}} \approx 4.58 \times 10^{-6}$ , and  $S^{\text{max}} \approx 0.05$ .

### B. Simulation protocol

The simulation protocol is set up in such a way that closely follows the experimental one [11, 21, 22]. Figure 2

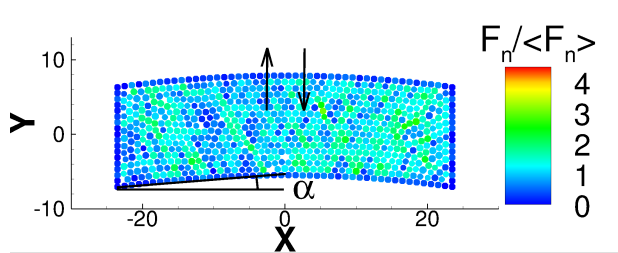


FIG. 2: Snapshot of a granular domain with the particles colored according to the total normal force normalized by the average normal force imposed on the particles. The arrows show the upward and downward direction of the shear. For animation, see [27].

shows the example of a granular system during the shear. The simulation domain is initially rectangular and of the size  $L_x$ ,  $L_y$ , with  $L_x = 47$ , and  $L_y = 17$ , both in units of  $\bar{d}$  (the numerical values are motivated by preliminary experiments [22]). The walls are composed of monodisperse particles of size  $\bar{d}$  and mass  $m$ . The system particles are chosen randomly from a uniform distribution with mean  $\bar{d}$  and width  $0.4\bar{d}$ . Initially, the particles are placed on a rectangular grid and initialized with random velocities. Then, the top and bottom walls are moved inward by applying initial external pressure,  $P_{\text{init}}$ , until equilibrium is reached and the position of the top and bottom wall stays fixed. At this point, we start shearing the system by prescribing a parabolic wall shape evolving in time. The maximum value of the shearing angle,  $\alpha_m$ , defined as the angle between the line connecting the endpoints of the left and right walls and the center of the bottom wall (see Fig. 2), is  $\alpha_m = 4^\circ$ . The motion of the top/bottom wall is periodic in time with period  $T$ . At the beginning of a cycle, the system is sheared from the flat state ( $\alpha = 0$ ) in the positive vertical direction. After reaching  $\alpha_m$ , the shear continues in the opposite (negative) direction, until  $\alpha$  reaches the value  $-\alpha_m$  and the direction of the shear is reversed. The cycle is complete when the system reaches  $\alpha = 0$ . More precisely, the motion of the top/bottom wall over time is given by

$$y(t) = \tan(\alpha_m) \frac{L_x}{2} \left[ 1 - \left( \frac{2x}{L_x} \right)^2 \right] v(t) + C \quad (4)$$

where  $x$  is the position of the wall particle with respect to the horizontal axis (assuming that  $x = 0$  for the center of the top/bottom wall) and  $v(t) = \gamma L_x$ ; the shear rate  $\gamma = 10^{-4} \pi \cos(2\pi t/T)/(2L_x) \approx 10^{-6}$ . The constant  $C$  assumes the appropriate value for the top and bottom wall particles.

We let the top wall slide up and down to readjust the pressure until the system reaches a stationary shear cycle. Then, we fix the end points of both walls and continue shearing until the pressure inside of the system (found from Cauchy stress tensor), averaged over a shear cycle, reaches a constant value. The animation is available as supplementary material [27]. We note in passing that

equilibration time (needed for the averaged pressure to reach a constant value) is long, as discussed further below. This fact increases the computational cost substantially, since a typical simulation requires a large number of time steps.

In the discussion that follows, we will use the average value of the pressure on top and bottom wall exerted by the system particles,  $P_1$  and  $P_2$ , respectively, to define the confining pressure,  $P_{\text{cf}} = (P_1 + P_2)/2$ .

### C. Energies in Sheared Granular Assembly

Here we discuss the energy balance during shear, considering in detail energy input, dissipation, and balance.

#### 1. Energy Input

During shear, the top and bottom walls have a prescribed parabolic shape that changes over time, and left and right boundaries are fixed. To compute the energy that is added to the system by moving the walls, one has to integrate the force over the boundary. There is no energy added to the system through the (fixed) left and right wall and we only need to find the energy entering through the collision of system particles with the top and bottom wall. This energy is given by

$$E_w = \sum_j \mathbf{F}_j \cdot \mathbf{n}_j ds, \quad (5)$$

where  $j$  sums over all collisions of the bottom and top wall particles with any of the system particles. Here,  $\mathbf{n}_j$  is the unit vector normal to the boundary at the location of the wall particle experiencing a collision,  $\mathbf{F}_j$  is the force on the wall particle and  $ds$  is the length element (here the wall particle diameter).

For the direction normal to the boundary at the center of the particle  $w_j$ , we have  $\mathbf{n}_j \cdot \mathbf{t}_j = 0$  with  $\mathbf{t}_j$  being a unit vector tangential to the boundary at  $w_j$ . The slope of the curve with the tangent vector  $\mathbf{t}_j$  is given by  $y|_{x=x_j} = 2ax_j$ , where the value of  $a$  is obtained from  $y(t)$  and  $x = x_j$  in Eq. (4). Thus  $\mathbf{t}_j = (\mathbf{e}_x + 2ax_j \mathbf{e}_y)/(1 + 4a^2x_j^2)^{1/2}$  and the unit normal vector  $\mathbf{n}_j$  is given by

$$\mathbf{n}_j = \frac{(-2ax_j \mathbf{e}_x + \mathbf{e}_y)}{\sqrt{1 + 4a^2x_j^2}} \quad (6)$$

Finally, from Eq. (5) and Eq. (6) we obtain the expression for the total energy added to the system by the moving walls

$$E_w = \sum_j \frac{(-2ax_j \mathbf{e}_x + \mathbf{e}_y)}{\sqrt{1 + 4a^2x_j^2}} \cdot \mathbf{F}_j ds. \quad (7)$$

## 2. Calculations of the Relevant Energy Contributions

Total energy stored in capillary bridge(s) between the particles  $i, j$ , can be found by integrating the force between them over the separating distance  $S$  (smaller than the maximum separating distance  $S^{\max}$ )

$$E_c^{i,j}(S) = \int_0^S |\mathbf{F}_{c,ij}| d\bar{S} \quad (8)$$

with the functional form of  $|\mathbf{F}_{c,ij}|$  given in Eq. (1) with the closed form of the energy stored in a capillary bridge given in Eq. (3). The total energy stored in all capillary bridges is

$$E_c = \sum_{i,j} E_c^{i,j}(S), \quad (9)$$

for all pairs of particles  $i, j$  that interact via capillary force.

Kinetic energy is computed as

$$E_k = \sum_{i=1}^N \frac{m_i |\mathbf{v}_i|^2}{2}, \quad (10)$$

where  $N$  is the total number of system particles and  $m_i$ ,  $|\mathbf{v}_i|$  are the mass and velocity of the  $i$ -th particle, respectively.

Elastic energy is computed as

$$E_{el} = \sum_{i,j} \frac{k_n x_{i,j}^2}{2}, \quad (11)$$

where  $i, j$  runs over all pairs of overlapping particles, including the system particle – wall particle interactions.

## 3. Energy Balance

Energy dissipated due to rupturing of capillary bridges is equal to the capillary energy at the maximum separating distance  $S^{\max}$ . To find the total energy dissipated due to breaking and reformation of the bridges, we sum over all ruptured bridges

$$E_{bb} = \sum_{i,j} E_c^{\max}. \quad (12)$$

The indices  $i, j$  refer to all pairs of particles that experienced bridge rupturing.

Total energy dissipated during a time step can be computed from the energy balance equation described next. The energy entering the system due to the moving walls has to be equal to the sum of the changes in the elastic, kinetic and capillary energies,  $\Delta E_{el}(t)$ ,  $\Delta E_k(t)$  and  $\Delta E_c(t)$ , between two consecutive time steps,  $(t - \Delta t)$  and  $t$ , the energy dissipated by breaking and reformation of

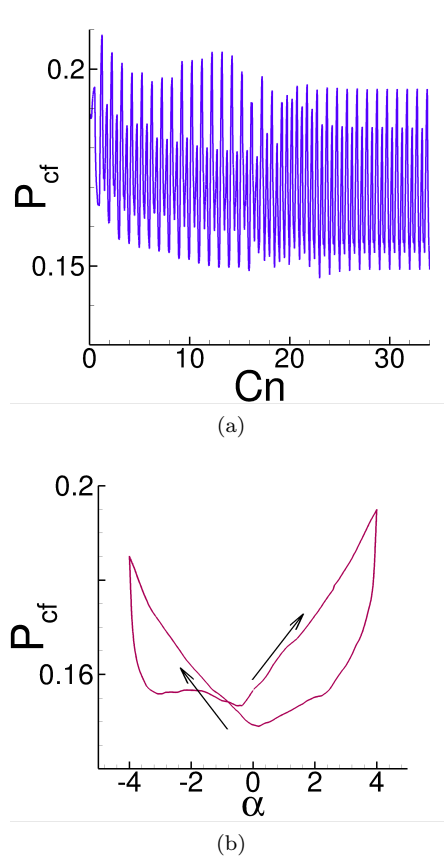


FIG. 3: (a) Evolution of the average confining pressure,  $P_{cf}$ , over the cycles (denoted by  $C_n$ ) and (b)  $P_{cf}$  vs.  $\alpha$  showing hysteresis for the last two cycles for the wet system with the initial pressure  $P_{init} \approx 0.2$ .

capillary bridges  $E_{bb}(t)$  and the energy dissipated due to friction and other non-linear effects,  $E_l(t)$ . The balance equation takes the form

$$E_w(t) = \Delta E_{el}(t) + \Delta E_k(t) + \Delta E_c(t) + E_l(t) + E_{bb}(t). \quad (13)$$

From Eq. (13), we can compute the dissipated energy,  $E_{diss}(t) = E_l + E_{bb}$ . For the dry systems we can use the same equation to find  $E_{diss}$  – there is no cohesion in the system and  $E_c$ ,  $E_{bb} = 0$  trivially. Note that we ignore the energy dissipation due to viscous effects, as appropriate for the slow shear rates considered [21, 22].

## III. RESULTS

### 1. Pressure Evolution

Figure 3(a) shows the average pressure on the top and bottom wall,  $P_{cf}$ , for the wet systems with  $P_{init} \approx 0.2$ . As already mentioned in Sec. II,  $P_{cf}$  evolves initially and finally reaches a stable behavior after  $C_n \approx 20$ . Therefore the data used to draw our conclusions presented in this section are collected only after  $P_{cf}$  stabilizes. Note



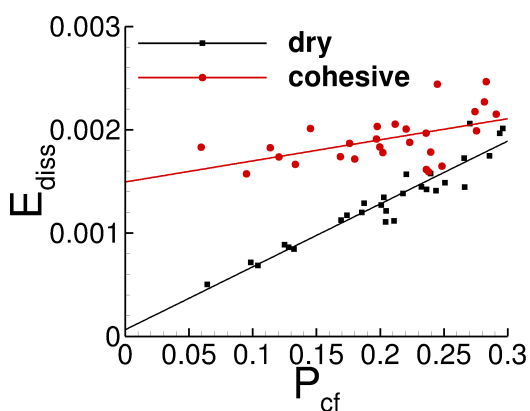


FIG. 4: Dissipated energy during shear as a function of the confining pressure for dry (black squares) and wet particles (red circles). The results are averaged over 15 cycles. For the wet system,  $E_{\text{diss}} = E_1 + E_{\text{bb}}$ , see Eq. (13).

that the number of cycles needed to achieve stable  $P_{\text{cf}}$  behavior differs for each value of  $P_{\text{init}}$  and we average the results over last 15 (stable) cycles.

Careful inspection of Fig. 3(a) shows that pressure evolution is not symmetric during a cycle, even when a stable regime is reached: the peak in  $P_{\text{cf}}$  that occurs when the system is sheared up towards  $\alpha_m$  is larger than the peak in  $P_{\text{cf}}$  when the system is sheared down towards  $-\alpha_m$ . The origin of this behavior can be traced back to the asymmetry in the imposed shearing protocol (the system is sheared at first up towards  $\alpha_m$ ); we have verified that shearing initially in the opposite direction reverses the asymmetry. This asymmetry is observed for all different  $P_{\text{init}}$  leading to the formation of a hysteresis loop illustrated in Fig. 3(b), which shows  $P_{\text{cf}}$  as a function of the shearing angle,  $\alpha$ , for the last two cycles.

## 2. Energy Transfer

Equation (13) allows to compute the energy dissipation for both wet and dry particles. Figure 4 shows the total dissipated energy,  $E_{\text{diss}} = E_1 + E_{\text{bb}}$  (recall that in the dry case  $E_{\text{bb}}$  is trivially zero), averaged over 15 stationary shear cycles, for both wet and dry assemblies. We note that the simulations, as implemented, are limited in the range of pressures that can be considered. For  $P_{\text{cf}} \lesssim 0.06$  it is difficult to carry out simulations since the particles may detach from the walls. For pressures larger than  $P_{\text{cf}} \gtrsim 0.3$ , the overlap between the particles becomes large, suggesting that a different interaction model may be needed there.

Figure 4 shows that the energy dissipated by friction increases with the confining pressure,  $P_{\text{cf}}$ , in a manner which is consistent with linear behavior (although the scatter of data is significant, particularly for the wet systems). The increase of dissipated energy with  $P_{\text{cf}}$  is steeper for dry granulate compared to the wet one, as

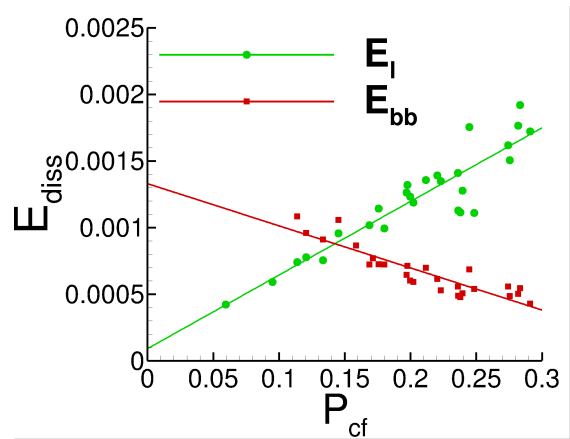


FIG. 5: Energy dissipation from breaking and reformation of the bridges and other non-linear effects as a function of  $P_{\text{cf}}$  averaged over 15 cycles for each  $P_{\text{cf}}$ .

expected since the coefficient of friction for dry particles is larger. Further simulations that are beyond the scope of this work will be needed to decrease the scatter of the data and confirm the ratio of the slopes.

The trend of the results shown in Fig. 4 clearly suggests that for the wet particles, the energy dissipated for  $P_{\text{cf}} \approx 0$ , has a non-zero value, while  $E_{\text{diss}} \approx 0$  for the dry case. For the larger pressures we notice that the energy is dissipated at a similar level for both types of considered systems.

## 3. Non-affine Motion

To investigate the non-zero energy loss at small confining pressure in the wet systems we focus next on the energy dissipation via breaking and reforming of the capillary bridges. The amount of the energy dissipated by breaking bridges per shear cycle can be computed directly from the number of capillary bridges as a function of time.

Figure 5 shows the energy dissipated by breaking and reforming of the capillary bridges,  $E_{\text{bb}}$ , and by friction and inelastic collisions,  $E_1$ . We observe that there is a crossover between the regime where the energy is dissipated mainly by  $E_{\text{bb}}$  for small  $P_{\text{cf}}$ , and mostly from friction and inelastic collisions, in  $E_1$ , for sufficiently large  $P_{\text{cf}}$ . We note that the energy dissipated in  $E_{\text{bb}}$  is decreasing with the increasing value of  $P_{\text{cf}}$ . This finding can be rationalized as follows: for larger  $P_{\text{cf}}$ , particles have less space to move and therefore there are fewer bridges that break. To support this explanation, we consider affinity of particle motion.

During shear, the particles move not only in the manner imposed by the moving walls, but also relative to each other. The relative motion of the particles, also referred to as the non-affine motion, is expected to play a role with regards to the breaking and reformation of

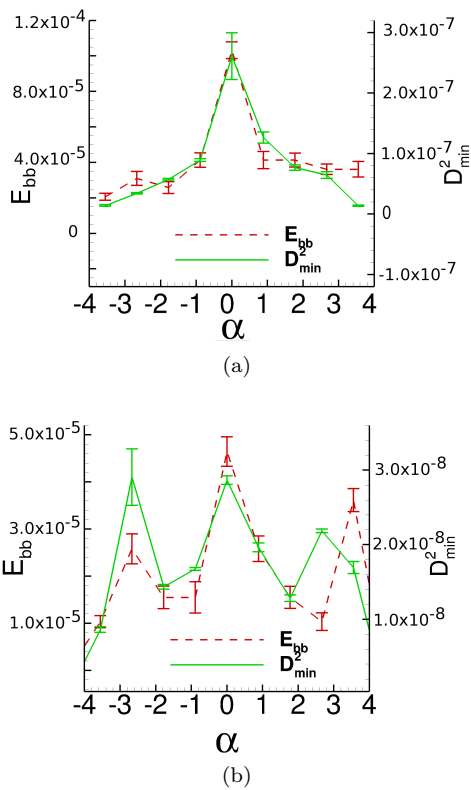


FIG. 6:  $E_{bb}$  and  $D_{\min}^2$  as a function of the shearing angle,  $\alpha$ , for (a)  $P_{cf} = 0.11$  and (b)  $P_{cf} = 0.28$ . The results are averaged over 15 cycles.

the capillary bridges and subsequently the energy dissipation tied to the capillary effects,  $E_{bb}$ . Therefore, with the particular goal of explaining the decrease of  $E_{bb}$  with increasing  $P_{cf}$  (see Figure 5) we investigate the non-affine motion of the particles as a function of  $P_{cf}$ , using the approach described in [28], and outlined briefly here.

First, for every particle  $p$ , we find the affine deformation matrix  $A_p(t)$  at the time  $t$  with the property

$$A_p(t)\mathbf{r}_p(t) = \mathbf{r}_p(t + \delta t), \quad (14)$$

where  $\mathbf{r}_p(t)$  is the position of the particle  $p$ . The non-affine motion is defined as the minimum of the mean squared displacement

$$D_{\min}^2 = \min \left\{ \sum_{n=1}^m \|\mathbf{r}_n - \mathbf{r}_p - [A_n \mathbf{r}_n - A_p \mathbf{r}_p]\|^2 \right\}, \quad (15)$$

where  $m$  is the number of particles within the distance of  $2.5d_{ave}$  from the particle  $p$ , and  $\mathbf{r}_n(t)$  is the position of the  $n$ -th particle within this distance.

Figure 6 shows the energy loss from the broken bridges,  $E_{bb}$ , as well as the measure of non-affine motion,  $D_{\min}^2$ , averaged over 15 cycles, as a function of the shearing angle,  $\alpha$ . We average the results over 9 equal size segments between  $-\alpha_m$  and  $\alpha_m$ ; we choose this number of segments so to able to show trends while still having reasonable statistics. The results are shown for one small and for

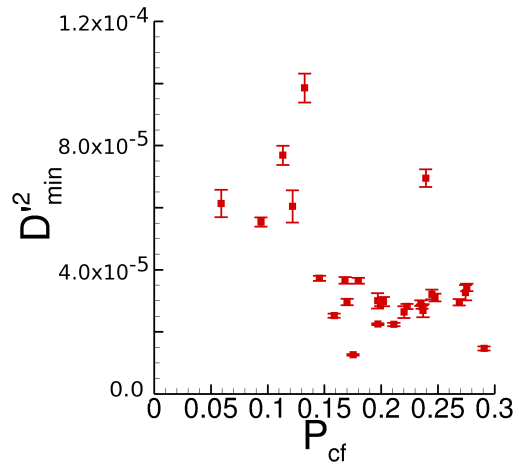


FIG. 7: Non-affine motion,  $D_{\min}^2$ , in the wet systems averaged over 15 cycles for each  $P_{cf}$ .

one large confining pressure,  $P_{cf} = 0.11$  and  $P_{cf} = 0.28$ , respectively. We see a clear correlation between  $E_{bb}$  and  $D_{\min}^2$ ; similar correlation is seen for other values of  $P_{cf}$ . For  $P_{cf} = 0.11$ , the magnitude of  $D_{\min}^2$  is much higher than for  $P_{cf} = 0.28$ ; the particles have more freedom to move in non-affine manner for small confining pressures. Furthermore, the value of  $D_{\min}^2$  is largest for  $\alpha \approx 0$ , when the shearing speed assumes its maximum.

Figure 7 summarizes the non-affine results. Here we plot non-affine motion as a function of  $P_{cf}$ , averaged over time and over 15 cycles. We denote the non-affine motion shown in this figure by  $D_{\min}^2$  since the data shown are computed over larger time intervals in order to reduce the computational cost, and thus the magnitude of the non-affine motion is larger than the one shown in Figure 6. Most importantly, Figure 7 shows that the overall decreasing trend of the total non-affine with  $P_{cf}$  is obvious. As a side note, we comment that we have verified that a modest increase in particle stiffness does not influence the trend of the non-affine motion with changing pressure.

The above findings show that the degree of non-affine motion is directly related to the breaking and reforming of the bridges and reversely to the confining pressure,  $P_{cf}$ . Therefore, a decrease of the non-affine motion explains the decrease of  $E_{bb}$  with increasing  $P_{cf}$ .

We note that we have also computed non-affine motion for the frictionless and elastic particles. The results (figure not included for brevity) show significantly larger degree of non-affinity for both considered systems, compared to the frictional, inelastic one considered so far. This is expected due to reduced energy loss in elastic and/or frictionless systems.



#### 4. Internal Cohesion

Another manner in which cohesion can influence energy dissipation is internal cohesion: capillary bridges pull particles together, leading to an enhanced friction at the contacts [11, 29] as well as damping due to inelasticity (see Appendix A) that may influence the energy dissipation through changing  $E_1$  in Eq. (13). To compute this effect, we proceed as follows: In equilibrium, the capillary force between the particles leads to a compressive force and an overall elastic energy  $E_{el} \approx 10^{-6}$ . Then, we carry out simulations with dry systems and find that this value of elastic energy corresponds to  $P_{cf} \approx 0.07$ . This value of  $P_{cf}$  leads to  $E_1 \approx 5 \times 10^{-4}$ , see Figure 5, being less than a third of the energy dissipated by breaking and reformation of capillary bridges,  $E_{bb}$ . Therefore, the results of our simulations suggest that the breakup of capillary bridges, and not the friction or the inelasticity of collisions, is the main source of energy dissipation in weakly compressed systems and causes non-zero values of  $E_{diss}$  as  $P_{cf} \rightarrow 0$ .

We note that linear extrapolation of the data shown in Figure 5 to  $P_{cf} < 0.06$  suggests even smaller values of  $E_1$ ; however since simulations can not be reliably carried out for such smaller values, we conservatively choose the value of  $5 \times 10^{-4}$  as the upper bound for  $E_1$  for  $P_{cf} \approx 0$ . The main point, that only a small part of energy is lost due to friction and inelasticity for small confining pressures, is clear from the overall trend of the data.

## IV. CONCLUSION

In this paper, we discussed the origin of energy dissipation in sheared wet and dry granular systems in numerical simulations following a similar setup as in recent experiments [11, 21] in the regime characterized by the presence of individual capillary bridges. For small confining pressure, wet systems are stiffer than dry ones due to the cohesion by virtue of capillary bridges formed between neighboring particles, which increase the energy dissipation in two ways. For the material parameters used in the simulations, about two thirds of the dissipated energy was found to result from breaking of the capillary bridges which were elongated above their maximum length. The remaining one third is caused by the cohesion which increases the contact forces between particles and thus causes friction even in an unconfined wet granulate. An increase of applied confining pressure is found to have two consequences. First, the simulations show that energy dissipation due to breakup of capillary bridges becomes less relevant due to a decrease of the non-affine particle motion. Second, the energy dissipation for both dry and wet granulates increases linearly with externally applied confining pressure due to increased particle–particle friction. Thus for sufficiently large confining pressure energy dissipation is always dominated by friction between grains. We expect that the

exact proportions describing relevance of various energy loss mechanisms may depend on the material parameters of the granular particles, and possibly on the system geometry (two versus three physical dimensions), however the main conclusion is general: for sufficiently small pressures, the dominant part of the energy loss is due to the effects related to cohesion, and in particular due to breakups of capillary bridges.

## ACKNOWLEDGMENTS

Stimulating discussions with Stephan Herminghaus are gratefully acknowledged. We further acknowledge the support by: the German Research Foundation (DFG) via GRK - 1276, Saarland University (SK, RS) and SPP 1486 ‘‘PiKo’’ under Grant No. HE 2016/14-2 (MB); by a start up grant from Saarland University (ALS); and by the NSF Grant No. DMS- 1521717 and DARPA contract No. HR0011-16-2- 0033 (LK, LK).

### Appendix A: Details of Simulation Techniques

The particles in the considered numerical system are modeled as 2D soft frictional inelastic circular particles that interact via normal and tangential forces, specified here in nondimensional form, using  $\bar{d}$ ,  $m$ ,  $\tau_c$  as the length, mass and time scale introduced in the main text of the paper.

Dimensionless normal force between  $i$ -th and  $j$ -th particle is

$$\mathbf{F}_{i,j}^n = k_n x_{i,j} \mathbf{n} - \eta_n \bar{m} \mathbf{v}_{i,j}^n, \quad (\text{A1})$$

where  $\mathbf{v}_{i,j}^n$  is the relative normal velocity,  $\bar{m}$  is reduced mass,  $x_{i,j} = d_{ave} - r_{i,j}$  is the amount of compression, with  $d_{ave} = (d_i + d_j)/2$  and  $d_i$ ,  $d_j$  diameters of the particles  $i$  and  $j$ . The distance of the centers of  $i$ -th and  $j$ -th particle is denoted as  $r_{i,j}$ . Parameter  $\eta_n$  is the damping coefficient in the normal direction, related to the coefficient of restitution  $e$ .

We implement the Cundall–Strack model for static friction [30]. The tangential spring  $\boldsymbol{\xi}$  is introduced between particles for each new contact that forms at time  $T = T_0$  and is used to determine the tangential force during the contact of particles. Due to the relative motion of particles, the spring length  $\xi$  evolves as  $\xi = \int_{T_0}^T \mathbf{v}_{i,j}^t(t) dt$  with  $\mathbf{v}_{i,j}^t = \mathbf{v}_{i,j} - \mathbf{v}_{i,j}^n$  and  $\mathbf{v}_{i,j}$  being the relative velocity of particles  $i$ ,  $j$ . The tangential direction is defined as  $\mathbf{t} = \mathbf{v}_{i,j}^t / |\mathbf{v}_{i,j}^t|$ . The direction of  $\boldsymbol{\xi}$  evolves over time and we thus correct the tangential spring as  $\boldsymbol{\xi}' = \boldsymbol{\xi} - \mathbf{n}(\mathbf{n} \cdot \boldsymbol{\xi})$ . The tangential force is set to

$$\mathbf{F}^t = \min(\mu_s |\mathbf{F}^n|, |\mathbf{F}^{t*}|) \mathbf{F}^{t*} / |\mathbf{F}^{t*}|, \quad (\text{A2})$$

with

$$\mathbf{F}^{t*} = -k_t \boldsymbol{\xi}' - \eta_t m \mathbf{v}_{i,j}^t. \quad (\text{A3})$$

Viscous damping in the tangential direction is included in the model via the damping coefficient  $\eta_t = \eta_n$ .

- 
- [1] A. Faure, P. York, and R. Rowe, *Eur. J. Pharm. Biopharm.* **52**, 269 (2001).
- [2] H. Leuenberger, *Eur. J. Pharm. Biopharm.* **52**, 279 (2001).
- [3] W. Paul and C. P. Sharma, *J. Mater. Sci. Mater. Med.* **10**, 383 (1999).
- [4] V. Komlev, S. Barinov, and E. Koplik, *Biomaterials* **23**, 3449 (2002).
- [5] S. Simons and R. Fairbrother, *Powder Tech.* **110**, 44 (2000).
- [6] J. Litster and B. Ennis, *Engineering of Granulation Processes: Particle Technologies Series, Springer Netherlands* (Springer Netherlands, 2004).
- [7] A. Realpe and C. Velázquez, *Chem. Eng. Sci.* **63**, 1602 (2008).
- [8] K. Shinagawa and Y. Hirashima, *Met. and Mat.* **4**, 350 (1998).
- [9] M. Z. B. Bhandari, N. Bansal and P. Schuck, *Handbook of Food Powders* (Woodhead Publishing, 2013).
- [10] J.-C. Géminard, W. Losert, and J. Gollub, *Phys. Rev. E* **59**, 5881 (1999).
- [11] Z. Fournier, D. Geromichalos, S. Herminghaus, M. M. Kohonen, F. Mugele, M. Scheel, M. Schulz, B. Schulz, C. Schier, R. Seemann, et al., *J. Phys. Condens. Mat.* **17**, 477 (2005).
- [12] N. Mitarai and F. Nori, *Adv. in Phys.* **55**, 1 (2006).
- [13] M. Scheel, R. Seemann, M. D. M. M. Brinkmann, A. Sheppard, B. Breidenbach, and S. Herminghaus, *Nat. Mater.* **7**, 189193 (2008).
- [14] J. Fiscina, M. Pakpour, A. Fall, N. Vandewalle, C. Wagner, and D. Bonn, *Phys. Rev. E* **86**, 020103 (2012).
- [15] A. Fall, B. Weber, M. Pakpour, N. Lenoir, N. Shahidzadeh, J. Fiscina, C. Wagner, and D. Bonn, *Phys. Rev. Lett.* **112**, 175502 (2014).
- [16] A. Fingerle, K. Roeller, K. Huang, and S. Herminghaus, *New J. Phys.* **10**, 053020 (2008).
- [17] K. Huang, K. Roeller, and S. Herminghaus, *Eur. Phys. J. Spec. Top.* **179**, 25 (2009).
- [18] R. Schwarze, A. Gladkyy, F. Uhlig, and S. Luding, *Gran. Matter* **15**, 455 (2013).
- [19] E. Brown, N. Rodenberg, J. Amend, A. Mozeika, E. Steltz, M. Zakin, H. Lipson, and H. Jaeger, *Proc. Natl. Acad. Sci.* **107**, 18809 (2010).
- [20] T. Halsey and A. Levine, *Phys. Rev. Lett.* **80**, 3141 (1998).
- [21] S. Herminghaus, *Adv. Phys.* **54**, 221 (2005).
- [22] S. Karmakar, M. Schaber, A.-L. Schuhmacher, M. Scheel, M. DiMichiel, M. Brinkmann, R. Seemann, L. Kovalcinova, and L. Kondic, unpublished.
- [23] L. Kovalcinova, A. Goulet, and L. Kondic, *Phys. Rev. E* **92**, 032204 (2015).
- [24] L. Kondic, *Phys. Rev. E* **60**, 751 (1999).
- [25] C. Willett, M. Adams, S. Johnson, and J. Seville, *Langmuir* **16**, 9396 (2000).
- [26] M. E. D. Urso, C. J. Lawrence, and M. J. Adams, *J. Colloid Interface Sci.* **220**, 42 (1999).
- [27] *See Supplemental Material at URL for animation of a shear cycle.*
- [28] L. Kondic, X. Fang, W. Losert, C. O'Hern, and R. Behringer, *Phys. Rev. E* **85**, 011305 (2012).
- [29] T. Mason, A. Levine, D. Ertz, and T. Halsey, *Phys. Rev. E* **60**, R5044 (1999).
- [30] P. Cundall and O. Strack, *Géotechnique* **29**, 47 (1979).